检测报告

报 告 编 号 ： AGC16910260602GS01

产 品 名 称 ： 主动降噪有线耳机

商 标 ： /

型 号 ： MH022 - 60686

委 托 单 位 ： 东莞市摩优科技有限公司

签 发 日 期 ： 2026 年 07 月 02 日

报 告 版 本 ： V1.0

深圳市鑫宇环检测有限公司

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测报告

报告编号	AGC16910260602GS01	委托单位	东莞市摩优科技有限公司
产品名称	主动降噪有线耳机	地　　址	广东省东莞市横沥镇村头工业区168号亿科产业园D栋9楼
商　　标	/	制造商	东莞市摩优科技有限公司
型　　号	MH022 - 60686	地　　址	广东省东莞市横沥镇村头工业区168号亿科产业园D栋9楼
参　　数	3.5mm音频线接口供电	工　　厂	东莞市摩优科技有限公司
样品来源	委托单位送样	地　　址	广东省东莞市横沥镇村头工业区168号亿科产业园D栋9楼
收样日期	2026年06月30日	完成日期	2026年07月02日

试验项目：
电引起的伤害（5章），标志与说明书（附录F），机械强度试验（4.4章 & 附录T）

试验依据标准：
GB 4943.1-2022《音视频、信息技术和通信技术设备 第1部分：安全要求》

试验结论：
所检项目合格。

测　　试	梁嘉晴	试验单位：深圳市鑫宇环检测有限公司
审　　核	梁达雄	2026年07月02日
批　　准	余涛（授权签字人）	地址：广东省深圳市宝安区福海街道和平社区重庆路骏丰工业园厂房19栋第一、二层

备注：
试验样品为主动降噪有线耳机，由3.5mm音频线接口供电。
测试结果中“-----”表示不适用。

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测结果

序号	试验项目	试验要求	试验结果	判定
1	电引起的伤害	1.电能量源的分级和限值 为了减小由于电流经过人体引起的疼痛效应和伤害的可能性，设备应提供第5章所规定的安全防护： --正常、异常及不用做安全防护的元器件、装置或绝缘的单一故障条件下在产品的可接触区域的稳态预期电压和接触电流不应超过ES1的限值。 --在基本安全防护或附加安全防护的单一故障条件下不超过 ES2 限值	符合要求	符合
		2.电能量源和安全防护的可触及性 a）对一般人员，下列部分应当是不可触及的： --ES2 的裸露零部件，但连接器的插针除外。然而，这种插针在正常工作条件下，用图 V.3 的钝头试具应当是不可触及的；和 --ES3 的裸露零部件；和 --ES3 的基本安全防护。	-----	不适用
		b）在预定的室外场所，对一般人员可触及的室外设备，其以下裸露部件应当是不可触及的： --正常工作条件下、异常工作条件下和不用作安全防护的元器件、装置或绝缘的单一故障条件下，超过 0.5 倍 ES1 电压限值的裸露部件；和 --在基本安全防护或附加安全防护的单一故障条件下超过 ES1 电压限值的裸露部件。	-----	不适用
		c)当ES3电压不超过420V峰值时，附录V的适用的试具不得接触到裸露的内部导电零部件。 当ES3电压大于420V峰值时，附录V的适用的试具不得接触到裸露的内部导电零部件而且距离该零部件应当有一段空气间隙。	-----	不适用
1	电引起的伤害	3.电气间隙与爬电距离 a)电气间隙 电气间隙的尺寸应当使得由于以下原因造成击穿的可能性降低： --暂态过电压；和 --可能进入设备的瞬态电压；和 --设备内产生的重复性峰值电压和其相关频率。 为了确定电气间隙，应当使用以下两种程序中的最高值： --程序 1：按照 5.4.2.2 确定电气间隙。 --程序 2：按照 5.4.2.3 确定电气间隙。或者，可以按照 5.4.2.4 的抗电强度试验确 定电气间隙是否足够，此时电气间隙应当至少保持按照程序 1 确定的值。	-----	不适用

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测结果				
序号	试验项目	试验要求	试验结果	判定
		b）爬电距离 爬电距离应不低于表 17 和表18规定的最小爬电距离，使得在给定的有效值工作电压、污染等级和材料组别下，不会发生绝缘闪络或击穿（例如，由于电痕化引起的）。	-----	不适用
		4.抗电强度试验 基本绝缘、附加绝缘或加强绝缘的抗电强度试验应满足下列三种方法中的最高的试验电压值： --方法 1：使用要求的耐压（根据来自交流电网电源或直流电网电源，或来自外部电路的瞬态电压来确定），按表 25 确定试验电压。 --方法 2：使用跨在电气间隙上的工作电压的峰值或重复性峰值电压中的较高者，按表 26 确定试验电压。 --方法 3：使用标称交流电网电源电压（包含暂态过电压），按表 27 确定试验电压。	-----	不适用
2	标志与说明书	1.基本要求 设备按要求提供了在设备安装、操作、维护和维修时所需要的设备标志、设备说明和指示性安全防护。 除非使用符号或另有说明，否则与安全有关的设备标志、说明和指示性安全防护应当使用规范中文。	符合要求	符合
		2.字母符号和图形符号 设备上用于安全目的的图形符号应当与GB/T 5465.2、GB/T 2893.2、GB/T31523.1、IEC 60417、ISO 7000或本部分中已有的符号一致。	-----	不适用
		--对于仅适用于在海拔2000m及以下地区使用的设备应当在设备明显位置上标注“仅适用于海拔2000m及以下地区安全使用”或类似的警告语句，或如下标识（见附录Z）：  如单独使用此标识，应当在说明书中给出标识的含义解释。	-----	不适用
		--对于仅适用于在非热带气候条件下使用的设备应当在设备明显位置上标注“仅适用于非热带气候条件下安全使用”或类似的警告语句，或如下标识（见附录Z）：  如单独使用此标识，应当在说明书中给出标识的含义解释。	-----	不适用

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测结果				
序号	试验项目	试验要求	试验结果	判定
		3.设备标志 a）设备标志的位置：设备标志应当在靠近或邻近需要标志的部位或区域，不得放在不用工具就能拆除的零部件上，除非就是要针对该零部件施加标志。 除非另有规定，F.3.2、F.3.3、F.3.6和F.3.7要求的设备标志应当标在设备的外部，不包括设备 的底部。但是，这些标志可以标在用手轻易可触及的区域。 除非标志的意义是明显的，否则应当在说明书中对标志作出解释。	符合要求	符合
		b）设备的识别标志：	符合要求	
		--制造商标识	见铭牌	
		--型号标识	MH022 - 60686	
		c）设备额定值的标志： --直接和电网电源连接的设备应当标有F.3.3.3至F.3.3.6规定的电气额定值。 --未装有直接和电网电源连接的装置，则无需标有任何电气额定值。但是，设备上的任何额定功率或额定电流标志应当符合B.2.5。	符合要求	
		--供电电压的性质	-----	
		--额定电压	-----	
		--额定频率	-----	
		--额定电流或额定功率	-----	
2	标志与说明书	--具有多个电源连接端的设备 如果设备具有多个电源连接端，则每一个连接端应当标有其额定电流或额定功率。 如果多个电网电源供电是相同的，则可以使用一个标志指明供电连接的数量。 如果设备具有多个电源连接端，且如果每一个连接端具有和其他连接端不同的额定电压，则每一个连接端均应当标有该连接端的额定电压。	-----	不适用
		d）电压设定装置 如果设备采用可由一般人员或受过培训的人员操作的电压设定装置，则改变电压设定的动作也应当能改变设备被设定的电压指示。当设备投入使用时，该设定应当是可见的。 如果设备采用只能由熟练技术人员操作的电压设定装置，且如果改变电压设定的动作并不能改变电压额定值的指示，则指示性安全防护应当说明，在改变电压设定时，应当也改变电压设定的指示。	-----	不适用

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测结果

序号	试验项目	试验要求	试验结果	判定
		e)端子和操作装置上的标志 --电网电源器具输出插座和电网电源输出插座的标志 如果设备上装有电网电源器具输出插座，则应当在该器具输出插座就近处标出其额定电压和规定 的电流或功率。如果装有符合GB/T 1002、GB/T 1003或相关国家标准的电网电源输出插座，则应当标有规定的电流或功率。	-----	不适用
		--开关位置的识别标志 对断开开关或断路器的位置应当做出标识。这种标识可以由文字、符号或指示器构成。 如果使用符号，则该符号应当符合GB/T 5465.2的规定。	-----	
		--更换熔断器的标识和额定值标志 如果熔断器是一般人员或受过培训的人员可更换的，则可相应更换的熔断器的标识应当标在熔断 器座的就近处。	-----	
		--更换电池的识别标志 如果电池可以用不正确类型的可更换电池来更换，则应当按M.10的规定提供指示性安全防护。	-----	
		--中性导体端子 对永久连接式设备，预定专用于连接电网电源中性导体的端子（如果有），应当用大写字母“N” 来标识。	-----	
		--端子标志的位置 F.3.5.5、F.3.6.1和F.3.6.3规定的端子标志不得标在螺钉、可拆卸的垫圈或在连接导体时可能被拆卸的其他零部件上。	-----	
		f）与设备类别有关的设备标志	-----	
2	标志与说明书	g)设备的IP额定值标志 如果设备预定要作为非IPX0防护等级使用，则该设备应当标有按GB/T 4208规定的对应防水防护等 级的IP代码。	-----	
		h）外部电源输出标志 外部电源的直流输出应当标有电压额定值，电流额定值和极性。当引脚配置防止极性反转时，不需要极性标志。外部电源的交流输出应当标记电压额定值、电流额定值，以及如果与输入频率不同时，标记频率值。	-----	
		i)标志的耐久性、清晰性和持久性 标示在设备上的所有标志均应当是耐久的和清晰的，并且在正常光照条件下应当易于辨认。	符合要求	符合
		j)标志持久性试验 试验时，用一块蘸有水的布不加明显的力手动擦拭标志15s，然后用一块蘸有F.3.10.3规定的溶剂 油的布在不同的地方或不同的样品上擦拭15s来进行试验。每个标志的试验后，该标志仍应当保持清晰,不得卷角或脱落。	符合要求	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测结果				
序号	试验项目	试验要求	试验结果	判定
		4.说明书 在要求有关安全方面的信息时，这种信息应当在安装说明书中或初次使用的说明中给出。这种信息应当在设备安装和初次使用前就能获得。	符合要求	
		对在儿童不可能出现的场所使用的，并且使用图V.2的铰接试验指来评定的设备，在用户说明书中应当有下列的或类似文字： **“本设备不适合在儿童可能会出现的场所使用”**	-----	
		说明书应当按适用的情况包括下列内容：		
		--确保正确和安全地安装和互连设备的说明。	符合要求	
		--对预定仅在受限制接触区使用的设备，说明书应当作这样的说明。	------	不适用
		--如果设备预定是要固定在位的，则说明书中应当解释如何牢固地固定设备。	------	
		--对具有按表 E.1 划分为 ES3 端子的音频设备，以及具有按 F.3.6.1 标识的端子的其他设备，说明书应当要求，与这些端子连接的外部导线应当由熟练技术人员来安装，或应当采用其结构能防止接触任何 ES3 电路的预制引线或软线来连接。	------	
		--如果采用保护接地作为安全防护，则说明书应当要求，设备的保护接地导体要连接到设施的保护接地导体。	------	
		--对具有保护接地导体，且其保护导体电流超过 5.2.2.2 的 ES2 限值的设备，设备应当标有符合5.7.6 规定的指示性安全防护。	------	
2	标志与说明书	--如果图形符号标志在设备上并用作指示性安全防护，则说明书应当解释该符号的意义。	------	
		--如果永久连接式设备没有安装全极电网电源开关，则安装说明书应当说明，在建筑物电气设 施中应当安装符合附录 L 的全极电源开关。	------	
		--如果可更换的元器件或模块是提供安全防护功能的，则应当按适用的情况，在一般人员说明书、受过培训的人员说明书，或熟练技术人员说明书中，提供可相应更换的元器件或模块的标识。	------	
		--对包含绝缘液体的设备，考虑制造商的绝缘液体数据和材料安全数据表中的信息，应当在适用的情况下提供安全说明，包括在需要时使用 PPE。	------	
		--室外设备的安装说明应当包括防护室外场所环境条件所需的任何特殊特性的细节。	------	
		--带有未经隔离的有线网络天线插座的设备，在说明书中必须给出“接入本设备的有线网络天线必须与 设备的保护地隔离，否则可能会引起着火等危险！！”类似文字的警告说明。	------	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测结果				
序号	试验项目	试验要求	试验结果	判定
		5.指示性安全防护 指示性安全防护要包括要素1a或要素2，或者包括这两个要素，以及要素3和4。如果对要素1a无法提供合适的符号，则可以用要素1b代替。 标在设备上的任何指示性安全防护要素应当在人员可能暴露在2级能量源或3级能量源部件之前就能看到，并且尽可能靠近能量源部件。	------	
3	机械强度试验	1.基本要求 如果固体安全防护（例如，外壳、挡板、固体绝缘、接地金属件、玻璃等）是一般人员或受过培训的人员可触及的，则该固体安全防护应当符合4.4.3.2至4.4.3.10章节（附录T.2至T.11）规定的相关机械强度试验。	符合要求	符合
		2.恒定力试验 a.10N的恒定作用力 b.30N的恒定作用力 c.100N的恒定作用力 d.250N的恒定作用力	符合要求	
3	机械强度试验	3.外壳冲击试验 样品取完整的外壳或能代表其最大未加强区域的部分，按其正常位置支撑好。用一个直径为50mm ±1mm、质量为500g±25g、光滑的实心钢球进行以下试验： 对水平表面，钢球由静止从距样品垂直距离为 1300mm±10mm 处自由落到样品上； 对垂直表面，将钢球用线绳悬吊起来，并使其像钟摆一样，从垂直距离为 1300mm±10mm 处摆落到样品上来施加水平冲击； 评估仅用作防火防护外壳的部件时，按上述试验进行，但垂直距离为410mm±10mm。 水平冲击试验可以在垂直或倾斜的表面上模拟进行，把样品与正常位置成90° 安装，然后进行垂直冲击试验来代替摆锤试验。	------	
		4.跌落试验 样品应能承受三次跌落冲击。 跌落高度 对台式设备和可移动式设备：750mm±10mm； 对手持式设备、直插式设备和可携带式设备：1000mm±10mm； 对仅用作台式设备和可移动式设备的防火防护外壳的部件：350mm±10mm； 对仅用作手持式设备、直插式设备和可携带式设备的防火防护外壳的部件：500mm±10mm。	符合要求	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

检测结果				
序号	试验项目	试验要求	试验结果	判定
		5.应力消除 模压或注塑成形的热塑性塑料外壳的结构，应当能保证外壳材料在释放由模压或注塑成形所产生的内应力时，该外壳材为的任何收缩或变形均不会暴露出危险零部件，也不会使爬电距离和电气间隙减小到低于2.10(或附录G)规定的值。	符合要求	
		6.玻璃冲击试验 试验样品全部区域支撑好后应当承受一次表T.1规定的冲击。冲击应当施加在代表玻璃中心的位 置。 规定的冲击应当由一个直径为50mm±1mm、质量为500g±25g的光滑的实心钢球施加。按图T.1所示， 从静止由不小于表T.1规定的垂直距离自由落下，沿垂直于样品表面的方向，以规定的冲击能量击打样 品。	------	不适用
3	机械强度试验	7.玻璃破碎试验 将试验样品全部区域支撑好，应当采取措施以确保碎片不会从破碎处飞散开。然后用一中心冲孔器，将其放置在距试验样品较长边缘之一的中点约15mm处击破试验样品。在破碎后最长5min内，不用任何助视装置，正常佩带的眼镜除外，用边长50mm的方格置于破碎面积（不包括距离任何边缘或孔洞15mm范围内的任何面积）的最粗裂缝区域的近似中心处数出方格内的碎片数。 试验样品的破碎程度应当达到在边长50mm的方格内数出的碎片数不少于45片。	------	
		8.伸缩或拉杆天线试验 伸缩或拉杆天线的天线末端拉件应当承受沿天线主轴方向20N的力持续1min。另外，如果天线末端拉件用螺纹来连接，则还要对另外5个样品的末端拉件施加拧松力矩。在拉杆固定的情况下逐渐施加力矩。当到达规定力矩时，保持该力矩的时间不大于15s。对任何一个样品，保持时间不得小于5s，而且5个样品的平均保持时间不得小于8s。 力矩值在表T.2中给出。	------	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

样品照片



图 1 – 外观照



图 2 – 外观照

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



图 3 – 外观照

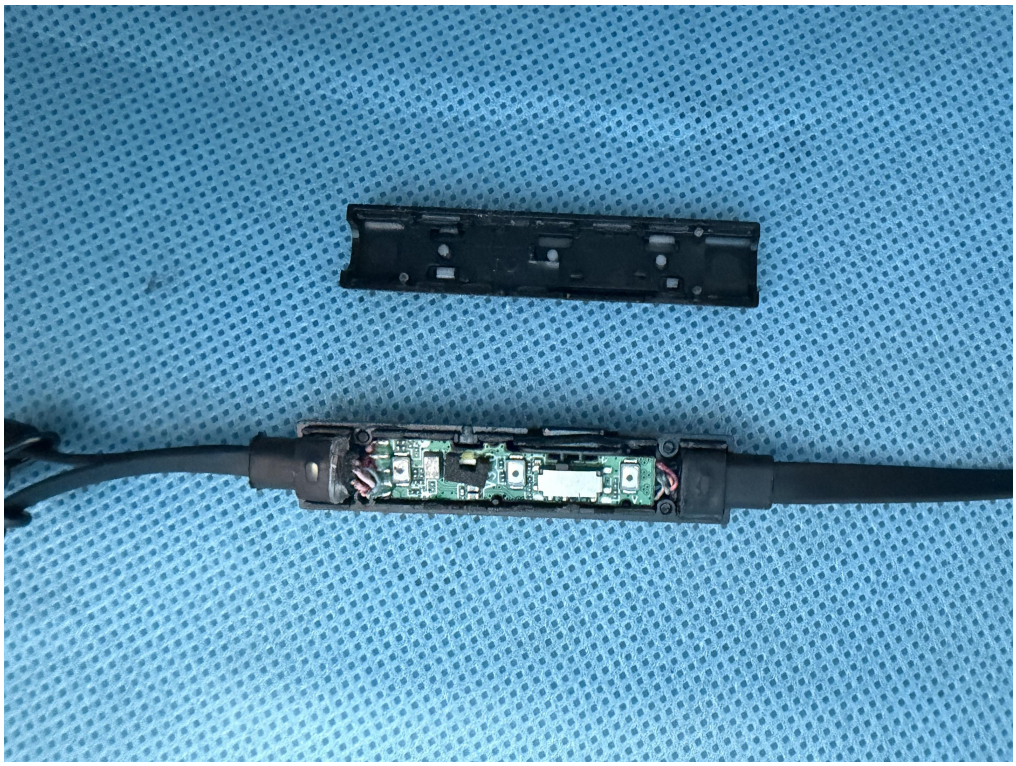


图 4 – 拆机照

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



图 5 – 拆机照



图 6 – 拆机照

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

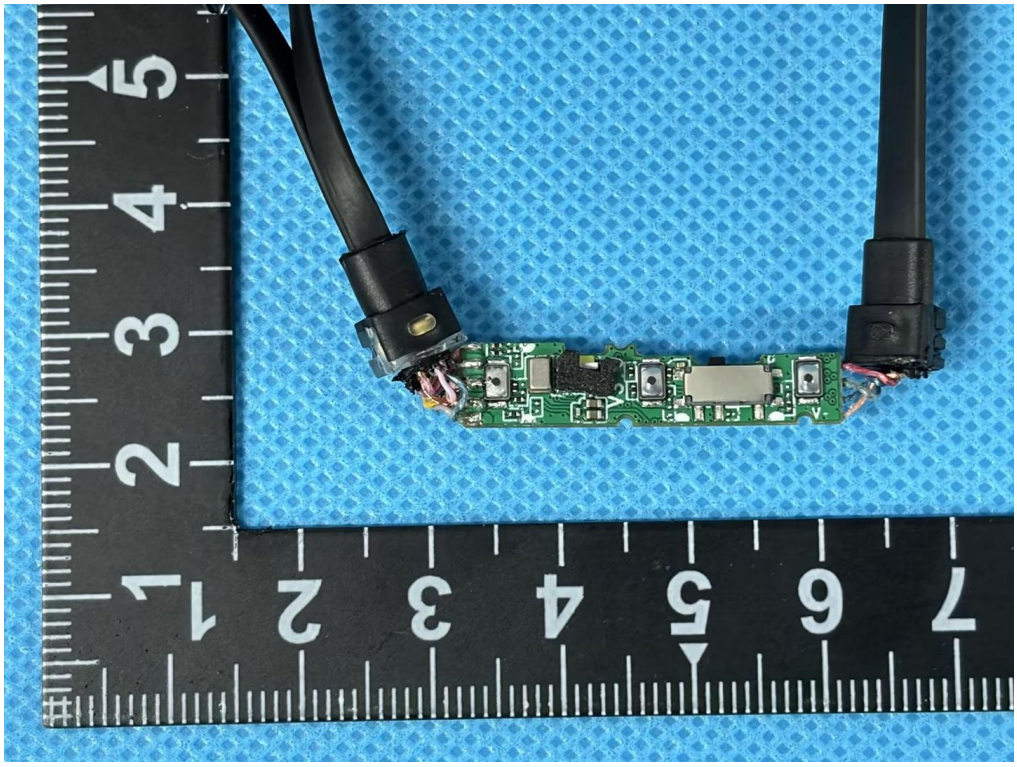


图 7 – PCB 板

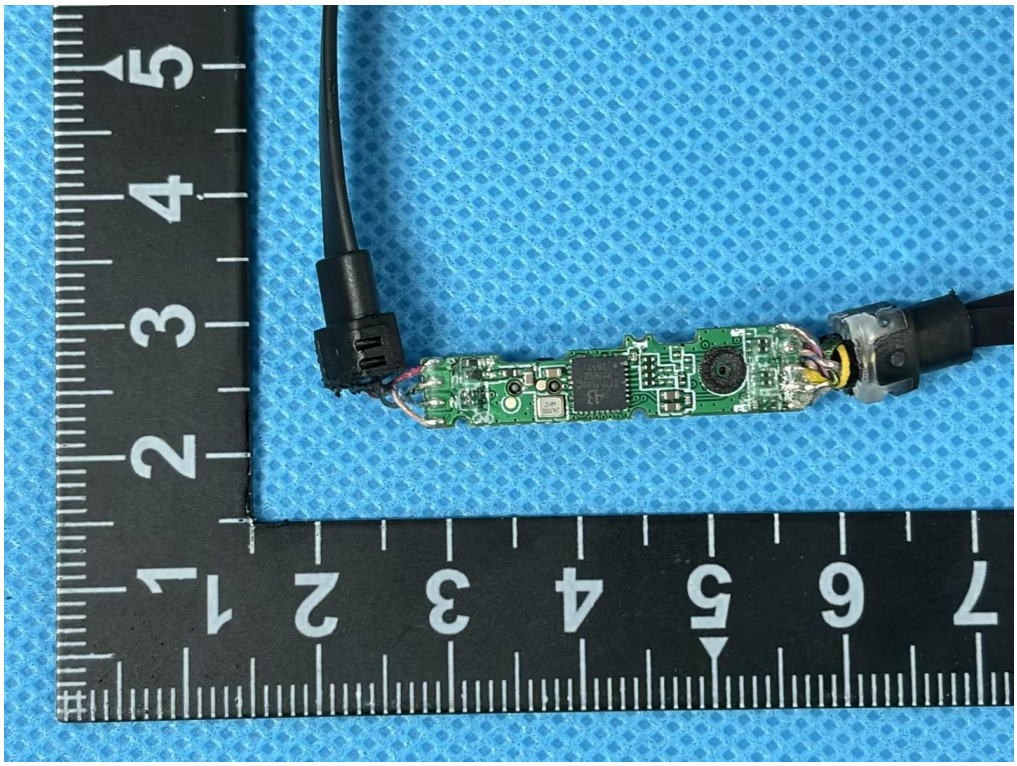


图 8 – PCB 板

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

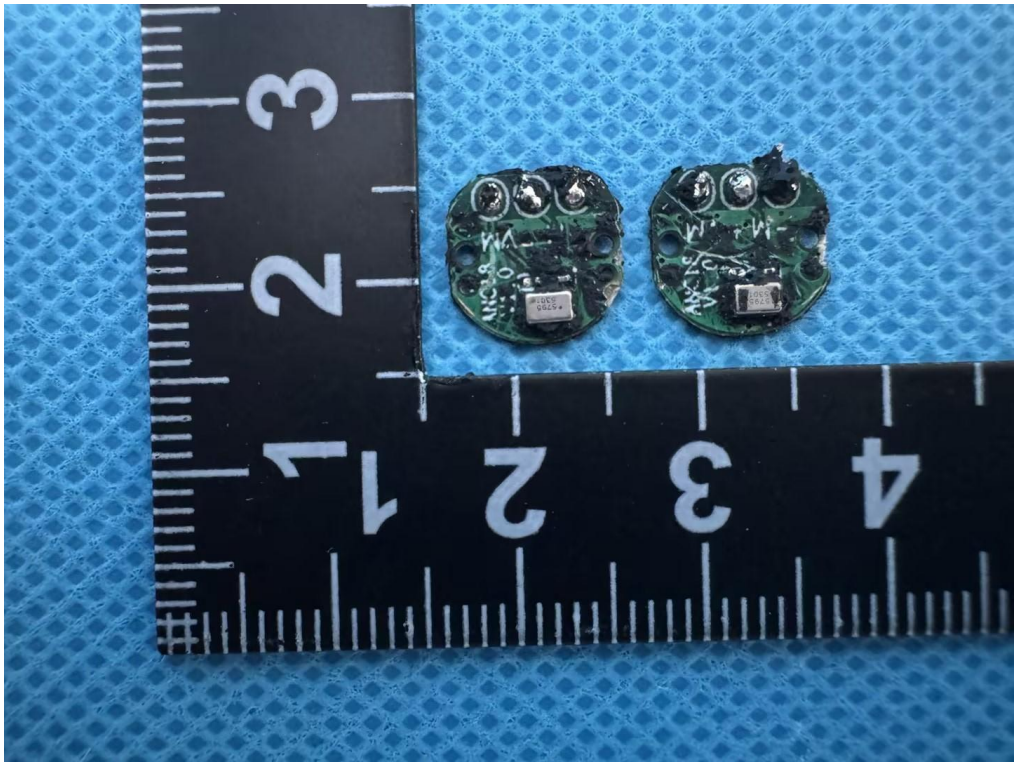


图 9 – PCB 板

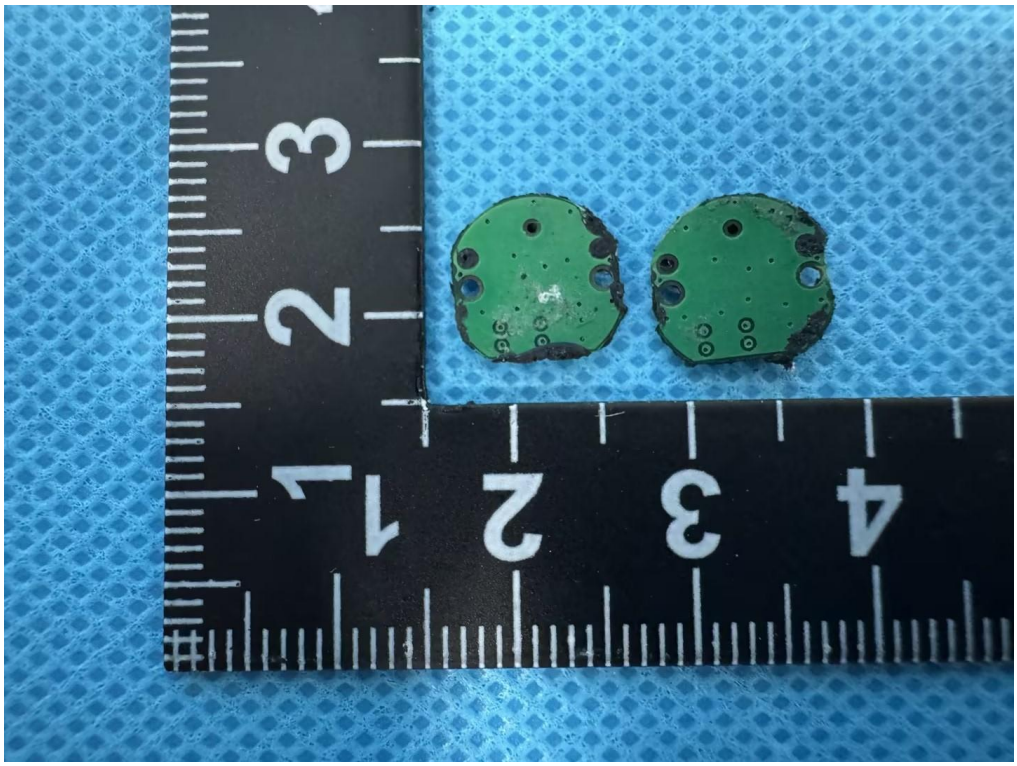


图 10 – PCB 板

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

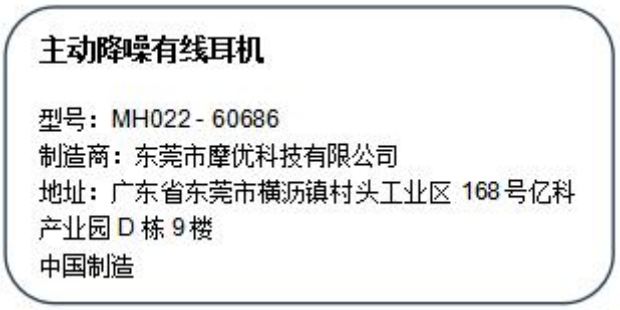


图 11 – 铭牌

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

签发测试报告条款

1. 深圳市鑫宇环检测有限公司(以下简称[本公司])为提供符合下述条款的测试和报告，而接受有关样品和货品。本公司基于下述条款提供服务，下述条款为本公司与申请服务的个人，企业或公司(以下简称[客户])的协议。

2. 由此测试申请所发出的任何报告(以下简称[报告])，本公司会严格为客户保密。未经本公司的书面同意，报告的整体或部分不得复制，也不得用于广告或授权的其他用途。然而，客户可以将本公司印制的报告或认可的副本，向其客户、供货商或直接相关的其他人出示或提交。除非相关政府部门、法律或法规要求，否则未经客户同意，本公司不得将报告内容向任何第三方讨论或披露。

3. 除非相关政府部门、法律或法院要求，否则未经公司预先书面同意，本公司毋需也无义务到法院对有关报告作证。

4. 未加盖资质认定标志（CMA）的报告，不具有对社会的证明作用。

5. 如果本公司确定报告被不当地使用，本公司保留撤回报告的权利，并有权要求其它适当的额外赔偿。

6. 本公司接受样品进行测试的前提是，该测试报告不能作为针对本公司法律行动的依据。

7. 如因使用本公司任何报告内的资料，或任何传播信息所描述与之有关的测试或研究导致的任何损失或损害，本公司概不负责。

8. 若需要在法院审理程序或仲裁过程中使用测试报告，客户必须在提交测试样品前将该意图告知本公司。

9. 电子版报告更改后将不被追回，客户有义务将更改后的报告提供给使用原报告的相关方。

10. 该测试报告的支持数据和信息本公司保存 6 年。个别评审机构有特别要求的，检测数据和报告的保存期可依情况变动。一旦超过上述提交的保存期限，数据和信息将被处理掉。任何情况下，本公司不必提供任何被处理的过期数据或信息。即使本公司事先被告知可能会发生相关的损害，本公司在任何情况下也不必承担任何损害，包括(但不限于)补偿性赔偿、利润损失、数据遗失、或任何形式的特殊损害、附带损害、间接损害、从属损害或任何违反约定、违反承诺、侵权(包括疏忽)、产品责任或其他原因的惩罚性损害。

-----报告结束-----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.